


VIVA

VIVA-FL-TRI
SAP CODE: 2001847

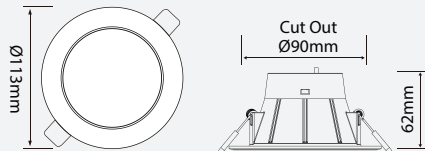


8W, dimmable,
switchable colour
temperature, flush
diffuser

White trimmed LED downlight
with flushed opal diffuser.



Photometric
Diagram

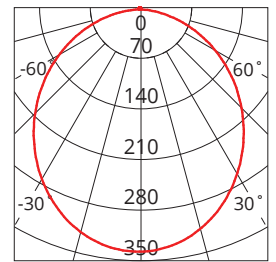

Unit: cd
- C0/180 100.0deg
- C90/270 100.0deg

KEY INFORMATION

| | |
|-------------------------|--------------------|
| Lumen Output | 800 / 850 / 800lm |
| Input Power | 8W |
| Hole Cutout Size | Ø90mm |
| Install | RECESSED |
| Dimming Options | *Phase-Cut Dimming |
| Trim Colour | WHITE |
| Warranty | 4yr |
| IP Rating | IP44 |
| IK Rating | N/A |
| IC Rating | IC-4 |
| Rebate Scheme Approvals | Pending Approval |

PHOTOMETRIC

| | |
|------------|---------------------|
| Efficacy | 100 / 106 / 100lm/W |
| LED | SMD |
| CCT | 3000 / 4200 / 5700K |
| CRI | >80 |
| Beam Angle | 100 |

ELECTRICAL

| | |
|-----------------------------|-------------------|
| Driver | Integral |
| Supply Input | 220-240V, 50/60Hz |
| Driver Output Voltage | N/A |
| Power Factor | >0.9 |
| LED Input Current (nominal) | N/A |
| Useful life @Ta25° (L70) | 35,000hr |

CONSTRUCTION

| | |
|---------------------------|------------------------|
| Housing | Polycarbonate |
| Optics | Polycarbonate Diffuser |
| Adjustable Angle | N/A |
| Fixings/Hardware | Rubberised Clip |
| Connection Type | 1m Flex & Plug |
| Total Weight | 0.2kg |
| Dimensions | Ø113 x 62mm |
| Operating Ambient Temp. | -20 to 45°C |
| Electrical Classification | Class 2 |

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.