


## CABAC DOUBLE LOCK CABLE TIES

### FEATURES AND BENEFITS

- Patented Double Lock® design has teeth on both sides of the tie which provides 50% greater tensile strength than UL standard 22kg tensile strength cable ties.
- Double Lock® cable ties have a loop tensile strength of 34KG and is made from durable, 100% nylon 6/6 material.
- These cable ties meet UL 94 V-2 flammability classification with an operating temperature of -40 to 85 degrees Celsius.
- Black ties are UV resistant which makes them suitable for outdoor and indoor applications.
- Natural ties are suitable for indoor applications only.
- Ideal for all bundling purposes; wires, cables, hoses or ducts.

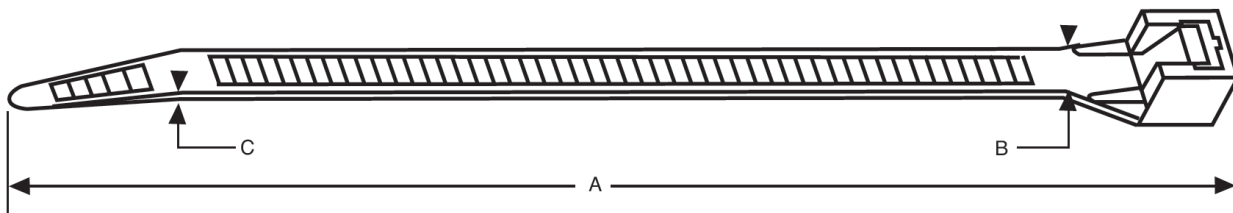

### SPECIFICATIONS AND ORDERING INFORMATION

PART NO.	DESCRIPTION	LENGTH (MM) "A"	WIDTH (MM) "B"	THICKNESS (MM) "C"	MAX BUNDLE DIAMETER (MM)
CT200NT/100DL	CABLE TIE 203 X 4.3MM DOUBLE LOCK NAT 100 PACK	203	4.3	1.4	50
CT290NTDL	CABLE TIE 280 X 4.3MM DOUBLE LOCK NAT 100 PACK	280	4.3	1.4	76
CT200BK/100DL	CABLE TIE 203 X 4.3MM DOUBLE LOCK BLACK 100 PACK	203	4.3	1.4	50
CT200BK/1000DL	CABLE TIE 203 X 4.3MM DOUBLE LOCK BLACK 1000 PACK	203	4.3	1.4	50
CT290BKDL	CABLE TIE 280 X 4.3MM DOUBLE LOCK BLACK 100 PACK	280	4.3	1.4	76
CT290BK/1000DL	CABLE TIE 280 X 4.3MM DOUBLE LOCK BLACK 1000 PACK	280	4.3	1.4	76
CT360BKDL	CABLE TIE 356 X 4.3MM DOUBLE LOCK BLACK 100 PACK	356	4.3	1.4	101

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.