


# Why are Clipsal's Weathershield® isolators No. 1?

**Easy! They're the toughest range of weatherproof isolators designed to suit Australian conditions.**

## WHA Series:

- Lockable
- new look design
- fast fit-off
- superior sealing
- chemically resistant IP66
- 8mm diameter locking facility to suit industry standard hasp
- protected rotary handle will not be accidentally turned on.

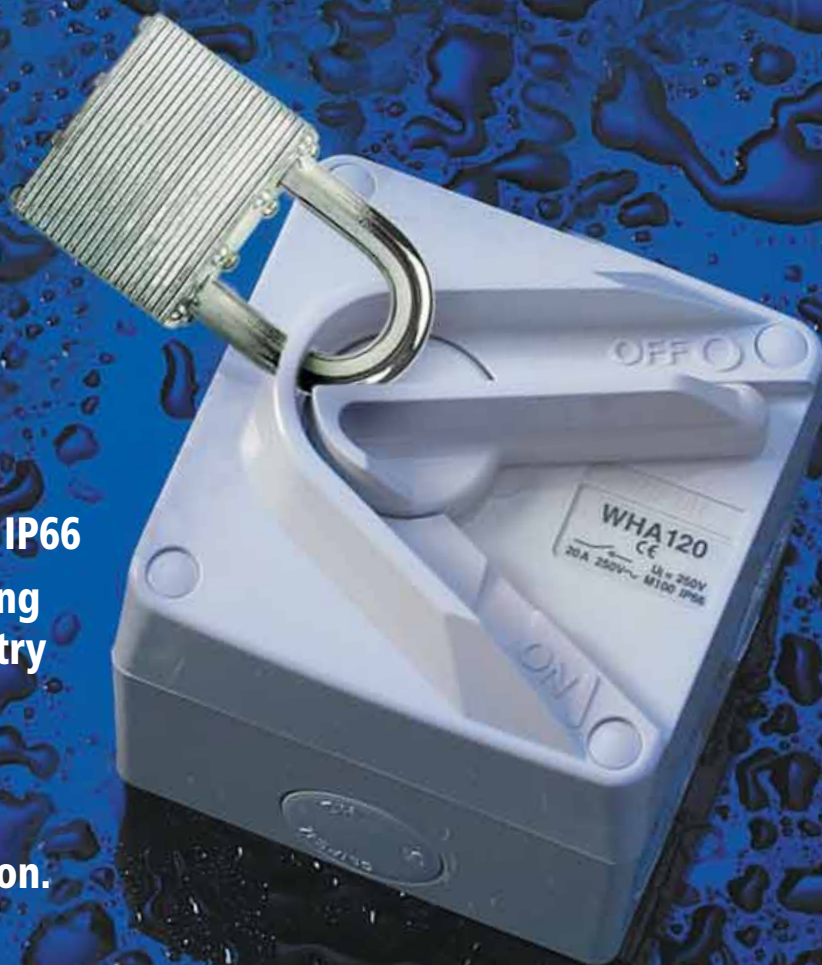

**Weather Protected – surface switch.  
Part of the Weathershield® Range.**

For environments where strong chemicals are used Clipsal Weathershield® products offer chemical resistant properties. The range of available products can be ordered by nominating the selected colours in the catalogue number code.

For more product/range information please contact your Clipsal Representative or refer to the Weathershield series technical catalogue.

Available in 1 and double pole versions ranging from 10 Amp – 35 Amp.



# WEATHERSHIELD® ISOLATING SWITCHES

Australia's largest range of weatherproof switchgear designed specifically to suit the harsh Australian environment has a product for every application.

The complete range includes a huge 8mm diameter padlocking facility and a rotary handle, which ensures the product will not accidentally be switched on. Raised on/off marking is also guaranteed not to rub off.


The series includes three frame sizes to suit varying cable widths and applications, from the compact WHA Series through to the large industrial WHC Series. The range is available in single, double, triple and four pole switches from 10 to 80 Amps.

## WeatherShield® WHA Isolating Switches

The impact resistant base and cover will survive the hardest knocks in almost any installation. The two sections are sealed with a co-injection gasket. The range provides ample conduit entries and is suitable for side entry from a vertical duct. Its compact size means it is aesthetically pleasing and suits installations where space is limited such as with residential air conditioning applications.

The switch dimensions of the WHA is 85mm x 85mm with an overall height of 84mm.

The product features ample conduit entries in the base. Two 25mm plain, two 20mm plain, one 25mm plain and one 20mm plain on each side of the box as well as one 25mm rear entry for back wiring. A 20mm plain to screwed adapter is provided for screwed entries.

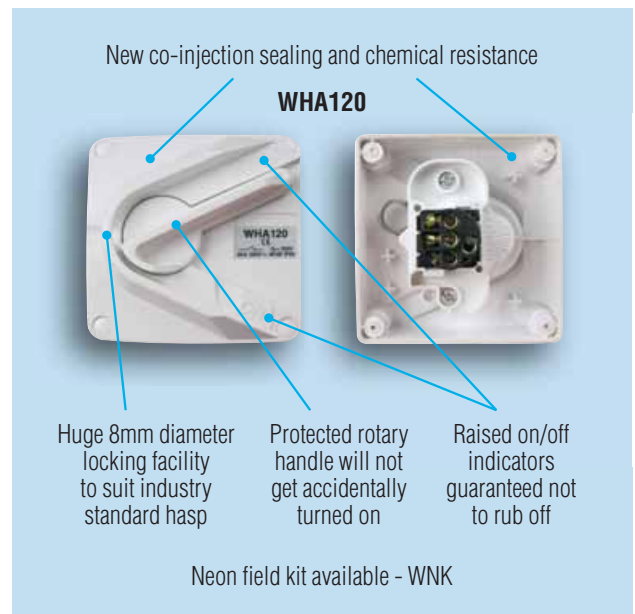

Cat No.	Description	M Rating	IP Rating
WHA110	10A 250V ~ Single pole surface switch	M100	66
WHA116	16A 250V ~ Single pole surface switch	M100	66
WHA120	20A 250V ~ Single pole surface switch	M100	66
WHA135	35A 250V ~ Single pole surface switch	M160	66
WHA210	10A 250V ~ Double pole surface switch	M100	66
WHA220	20A 250V ~ Double pole surface switch	M100	66

For neon version use field fitted WNK (Weatherproof Neon Kit)  
Terminal Detail - 1 way plus looping terminal  
Terminal Bore - 4.1mm  
Maximum Cables - 3 x 2.5mm<sup>2</sup>

## Product of Clipsal Australia Pty Ltd

ABN 27 007 873 529

### Head Office

12 Park Terrace, Bowden  
South Australia 5007  
Telephone (08) 8269 0511  
Facsimile (08) 8340 1724  
Internet clipsal.com  
E-Mail plugin@clipsal.com.au

### National Customer Service Enquiries:

**1300 2025 25**

### National Customer Service Facsimile:

**1300 2025 56**

### International Enquiries

### International Sales and Marketing

Telephone + 61 8 8269 0587  
Facsimile + 61 8 8340 7350  
E-Mail export@clipsal.com.au

## New Zealand

### Clipsal Industries (NZ) Ltd

Telephone (09) 576 3403  
Facsimile (09) 576 1015  
E-Mail headoffice@clipsal.co.nz

### Customer Service

Free Fax (0508) 250 305  
Auckland/Mobile Phone (09) 572 0014  
Free Phone (0508) CLIPSAL  
2547725

You can find this brochure and many others online in PDF format at:

**clipsal.com**

Follow the links off the home page or access the following page directly:

**clipsal.com/wat\_lib\_pdf.cfm**

**clipsal.com**

Clipsal Australia Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

©Copyright Clipsal Australia Pty Ltd 2007. All rights reserved.

This material is copyright under Australian and international laws. Except as permitted under the relevant law, no part of this work may be reproduced by any process without prior written permission of and acknowledgement to Clipsal Australia Pty Ltd.