


# DAWN 20W

DN20WRND-TRI

SAP CODE: 2001699

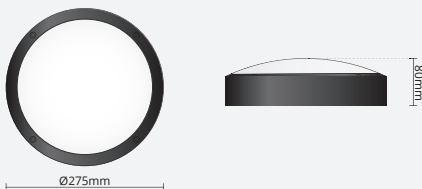


20W, Weather and impact resistant, Selectable colour temperature, LED Bunker

A round robust bunker light constructed with aluminium body and opal diffuser providing decorative solution for both residential and commercial applications.

Accessories  
EYELID TRIM  
DNRND-EL270



Photometric Diagram



Unit: cd  
- C0/180 120.0deg  
- C90/270 120.0deg

## KEY INFORMATION

Lumen Output	2050 / 2050 / 1890lm
Input Power	20W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	*Phase-Cut Dimming
Trim Colour	BLACK
Warranty	5yr
IP Rating	IP66
IK Rating	IK10
IC Rating	N/A
Rebate Scheme Approvals	N/A

## PHOTOMETRIC

Efficacy	103 / 103 / 94lm/W
LED	SMD
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	120°

## ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40VDC
Power Factor	>0.9
LED Input Current (nominal)	500mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	1.3kg
Dimensions	Ø275 x 80mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.