



DURALITE

DURALITE18/36W12

SAP CODE: 2001498

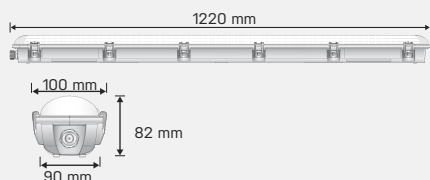

Photometric Diagram



Unit: cd
 - C0/180 120.0deg
 - C90/270 120.0deg

Dual intensity 18/36W outdoor LED batten

18W or 36W with choice of 4000K or 5000K, weatherproof LED batten

Accessories
SUSPENSION KIT

KEY INFORMATION

Lumen Output ^{36W}	4160 / 4150 / lm
^{18W}	2720 / 2680 / lm
Input Power	18 / 36W
Hole Cutout Size	N/A
Install	SUSPENDED, SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	Grey
Warranty	4yr
IP Rating	IP66
IK Rating	IK09
IC Rating	N/A
Rebate Scheme Approvals	COMING SOON

PHOTOMETRIC

Efficacy ^{36W}	115 / 115 / lm/W
^{18W}	151 / 149 / lm/W
LED	SMD
CCT	4000 / 5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	90-120VDC
Power Factor	>0.9
LED Input Current (nominal)	200-350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Bracket
Connection Type	Terminal Block
Total Weight	2kg
Dimensions	1220 x 100 x 82mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 1