




OXFORD

OXFORD12
SAP CODE: 2001885

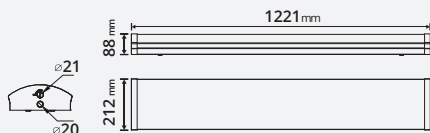


210mm Extra wide,
Tritone LED batten,
Flicker-free driver with
four power settings

OXFORD is an extra wide body batten with aesthetically pleasing and low glare design to minimize clutter on the ceiling for a wide variety of applications.



Photometric Diagram



Unit: cd
- C0/180 120 deg
- C90/270 120 deg

KEY INFORMATION

Lumen Output	40W	4200 / 4400 / 4200lm
	32W	3620 / 3470 / 3440lm
	29W	3140 / 3280 / 3130lm
	20W	2200 / 2300 / 2200lm
Input Power	40W, 32W, 29W, 20W	
Hole Cutout Size	N/A	
Install	SURFACE MOUNT	
Dimming Options	Non-Dimmable	
Fitting Colour	WHITE	
Warranty	4yr	
IP Rating	IP20	
IK Rating	N/A	
IC Rating	N/A	
Rebate Scheme Approvals	N/A	

PHOTOMETRIC

Efficacy	40W	105 / 110 / 105lm/W
	32W	113 / 108 / 108lm/W
	29W	108 / 113 / 108lm/W
	20W	110 / 115 / 110lm/W
LED	SMD	
CCT	4000 / 4700 / 5700K	
CRI	>80	
Beam Angle	120°	

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	58VDC
Power Factor	>0.9
LED Input Current (nominal)	350-700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Steel
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	3.55kg
Dimensions	1238 x 212.7 x 88.7mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 1