

TRIPROOF20/40W12-TRI

QUICK FACTS

Input power	20W / 40W
Power Factor	≥0.9
IP Rating	65
Dimming	Optional
CCT	4000K / 5000K / 6500K
Lumen output 20W	2227lm / 2254lm / 1965lm
40W	4085lm / 4411lm / 4049lm
CRI	80
Beam Angle	120°
Fascia Colour	White
Installation	Surface Mount
Warranty	5 years

PRODUCT SPECIFICATIONS


Supply Voltage	240-265V
Supply Frequency	50-60Hz
Cable	NO
Body	PC
Diffuser	PC
Driver	Integral
Weight	G.W : 2.6kgs
	N.W : 2.0kgs
Ambient Temp	-30°C - 65°C
Avg. lifetime	≥50,000 hrs@ ta 25°C

Option:
TRIAC Dimming, DALI Dimming,
1-10V Dimming

PHOTO



PHOTOMETRIC DIAGRAM

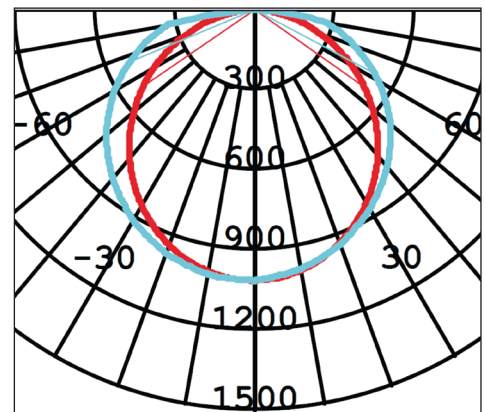


UNIT: cd

— C0/180 110.2deg

— C90/270 129.5deg

DIMENSIONS

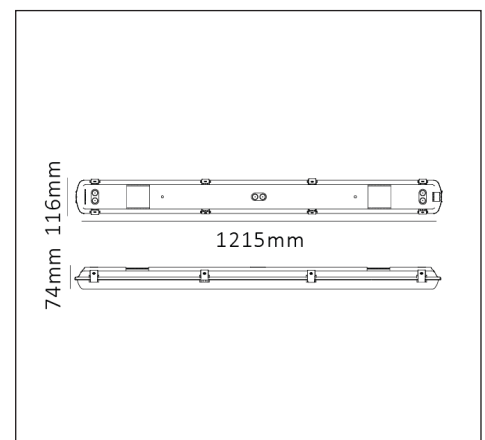

Subject to change without notice, errors and omission excepted. Always make sure to use the most recent release.