


VIVA145 Tritone

VIVA145-TRI
SAP CODE: 2001103

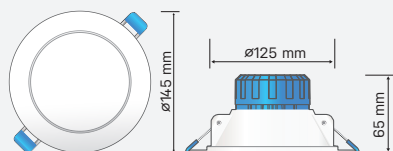


14W Tritone, flush
diffuser large LED high
output downlight

The VIVA Tritone is a fixed
switchable colour temperature
high output downlight suitable
for large cutouts.



Photometric
Diagram

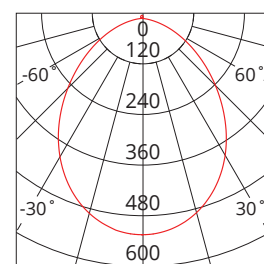

Unit: cd
- C0/180 90.0deg
- C90/270 90.0deg

KEY INFORMATION

Lumen Output	1240 / 1260 / 1160lm
Input Power	14W
Hole Cutout Size	Ø125mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	4yr
IP Rating	IP44
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	VEET; REES; IPART LCP 13.26

PHOTOMETRIC

Efficacy	89 / 90 / 83lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	90°
MacAdam (SDCM)	≤ 1

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	72VDC
Power Factor	>0.9
LED Input Current (nominal)	170mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium & Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.2m Flex & Plug
Total Weight	0.29kg
Dimensions	Ø145x65mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.