

# Floryn

## FLA

### Features

- Die-cast aluminium base
- Low energy consumption
- Rubber supply cable
- Fast turn-on, near zero maintenance
- Adjustable mounting bracket

### Applications

- Plazas
- Courtyards
- Factories, warehouses
- Gardens, parks
- Sporting venues

### Standards

- Manufactured under ISO 9001:2015 to standards
- IES/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.5
- IEC/AS/NZS CISPR 15






## Specifications

Model	FLA10G1xK	FLA30G1xK	FLA50G1xK	FLA100G1xK	FLA150G1xK	FLA200G1xK
Nominal Power (W)	10	30	50	100	150	200
Input Voltage	220 - 240 VAC 50 / 60 Hz					
Luminous Flux (lm)	850	3000	4700	9180	14,400	18,300
Efficacy (lm/W)	85	95	95	95	95	95
CRI	≥ 70					
Power Factor	> 0.95					
Colour Temp. (K)	3000 / 4000 / 5000 / 6000					
LED Life L70B50 (hr)	50,000					
Ambient Temp. (Ta)	40 °C					
Weight (kg)	0.40	0.75	0.95	1.75	3.75	3.75

"x" denotes CCT, 3 = 3000K ; 4 = 4000K ; 5 = 5000K ; 6 = 6000K


## Lighting Data

FLA200G14K

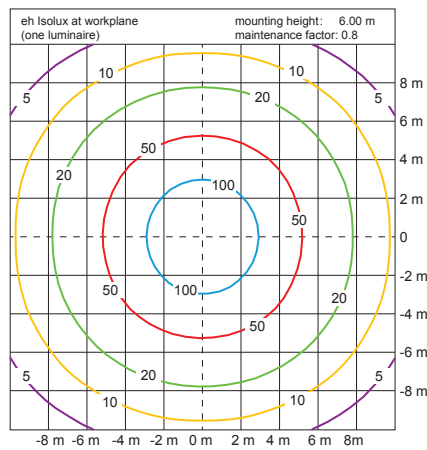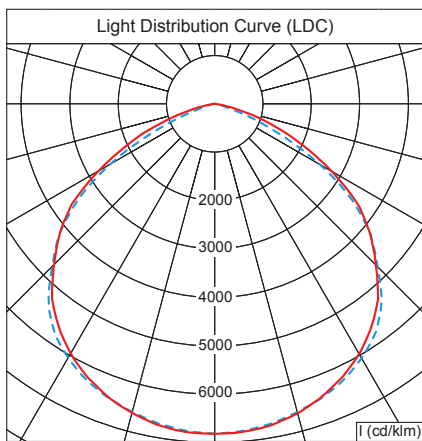


## Dimensions


FLA10G1xK

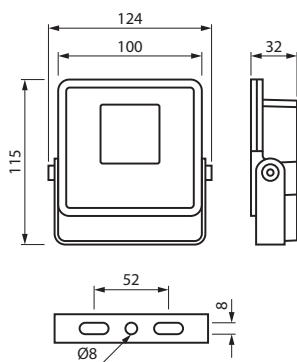


FLA30G1xK

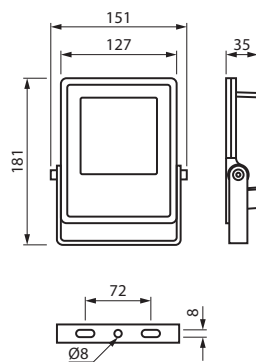


FLA50G1xK

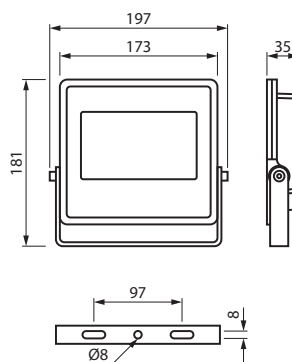

FLA100G1xK

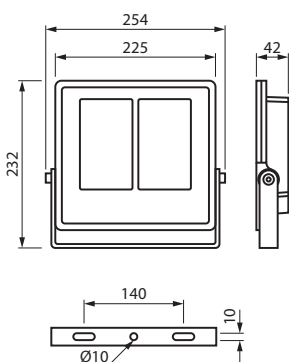

FLA150G1xK

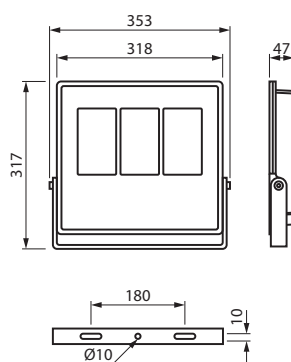

FLA200G1xK

