

Ceiling Fans

AeroGlide

SYSTEM

Maximises air flow and fan efficiency

Ensures smooth, low noise operation

Produces balanced, aerodynamic rotational movement

The Aero Glide System is the next generation in innovative ceiling fan technology. It utilises aerodynamic engineering techniques in combination with ergonomic quick connect terminals that simplifies wiring and allows for fast installation.

Its resulting design maximises air flow and fan efficiency whilst still providing an ultra-smooth, low noise operation.

Aero Glide System is integrated into the premium ceiling fan range including the Flair, Quinton and Juliet models.

Our years of experience and technical proficiency ensure the Aero Glide Systems' inherent attributes and world class components, deliver a balanced, aerodynamic rotational movement.











COMPLETE RANGE OVERVIEW

FLAIR



QUINTON



JULIET



SCUD



OPTIONAL REMOTE









FLAIR

3 BLADE CEILING FAN

AeroGlide SYSTEM












The Flair 3 blade ceiling fans are available with and without dimmable LED light. They feature an innovative blade design that maximises air flow and provides excellent air circulation and cooling effect. The Flair range is engineered for fast and efficient installation, and fitted with a reliable high quality AC motor.

- Pre-balanced for smoother, low noise operation.
- Made from durable ABS for a long working life.
- 18 watt dimmable LED light can be set to cool, neutral or warm white (LED light models only).
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Available in black or white.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplify wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).

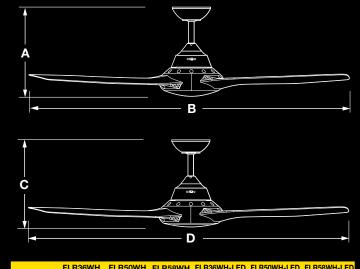

MODEL				FLR36BK-LED		
A	360mm/14.2"	360mm/14.2"	360mm/14.2"	-	-	-
В	900mm/35.4"	1270mm/50"	1470mm/57.9"			
С	-	-	-	355mm/14"	355mm/14"	355mm/14"
D	-	-	-	900mm/35.4"	1270mm/50"	1470mm/57.9"



3 speed wall controller with light switch included.



Optional Remote
Control (SFREMOTE)




MODEL	FAN SIZE	COLOUR	LED LIGHT	
FLR36WH	900mm/35.4"	White	No	
FLR36BK	900mm/35.4"	Black	No	
FLR50WH	1270mm/50"	White	No	
FLR50BK	1270mm/50"	Black	No	
FLR58WH	1470mm/58"	White	No	
FLR58BK	1470mm/58"	Black	No	
FLR36WH-LED	900mm/35.4"	White	Yes	
FLR36BK-LED	900mm/35.4"	Black	Yes	
FLR50WH-LED	1270mm/50"	White	Yes	
FLR50BK-LED	1270mm/50"	Black	Yes	
FLR58WH-LED	1470mm/58"	White	Yes	
FLR58BK-LED	1470mm/58"	Black	Yes	
MODEL	FLR36WH FLR36BK FLR36WH-LED FLR36BK-LED	FLR50WH FLR50BK FLR50WH-LED FLR50BK-LED	FLR58WH FLR58BK FLR58WH-LED FLR58BK-LED	
Max. Air Flow m³/hr	12,630	11,700	12,480	
Watts	75	75	85	
Volts	220-240	220-240	220-240	
Hertz	50	50	50	
LED LIGHT SPECIFICATIONS				

LED LIGHT SPECIFICATIONS

 Lumens
 1120
 1330
 1230


 Light Colour Temperature
 3000K
 4000K
 5700K








(Colour Temperature: 3000K) (Colour Temperature: 4000K)




(Colour Temperature: 5700K)

Colour indicated in drawings above is for illustrative purposes only.

REVERSIBLE ROTATION

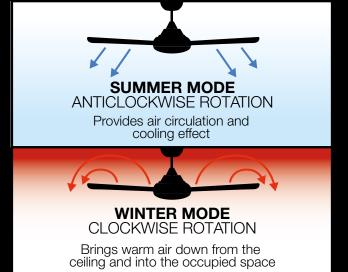



Mountable on ceilings with a maximum angle of 18°.







QUINTON

4 BLADE CEILING FAN













The Quinton 4 blade ceiling fans with and without dimmable LED light provide exceptional air circulation and cooling effect within indoor and covered outdoor areas.

They are made from durable ABS for a long working life

They are made from durable ABS for a long working life and pre-balanced for smoother, low noise operation.

- Innovative blade geometry maximises air flow & fan efficiency.
- 18 watt dimmable LED light can be set to cool, neutral or warm white (LED light models only).
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Available in black or white.
- Engineered for fast and efficient installation.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplifies wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).



3 speed wall controller with light switch included.



Optional Remote Control (SFREMOTE)

A		B -		
C		D -		
MODEL	QTN48WH QTN48BK	QTN52WH QTN52BK	QTN48WH-LED QTN48BK-LED	QTN52WH-LED QTN52BK-LED

	QTN48BK	QTN52BK	QTN48BK-LED	QTN52BK-LED
Α	340mm/13.4"	340mm/13.4"	-	-
В	1220mm/48"	1320mm/52"	-	-
С	-	-	370mm/14.6"	370mm/14.6"
D	-	-	1220mm/48"	1320mm/52"



MODEL	FAN SIZE	COLOUR	LED LIGHT
QTN48WH	1220mm/48"	White	No
QTN48BK	1220mm/48"	Black	No
QTN52WH	1320mm/52"	White	No
QTN52BK	1320mm/52"	Black	No
QTN48WH-LED	1220mm/48"	White	Yes
QTN48BK-LED	1220mm/48"	Black	Yes
QTN52WH-LED	1320mm/52"	White	Yes
QTN52BK-LED	1320mm/52"	Black	Yes


MODEL	QTN48WH QTN48BK QTN48WH-LED QTN48BK-LED	QTN52WH QTN52BK QTN52WH-LED QTN52BK-LED
Max. Air Flow m³/hr	10,560	13,120
Watts	75	75
Volts	220-240	220-240
Hertz	50	50

LED LIGHT SPECIFICATIONS	
--------------------------	--

Lumens	1225	1450	1350
Light Colour Temperature	3000K	4000K	5700K










REVERSIBLE ROTATION




Provides air circulation and cooling effect



Brings warm air down from the ceiling and into the occupied space





Colour indicated in drawings above is for illustrative purposes only.







AeroGlide SYSTEM

JULIET

4 BLADE CEILING FAN















The Juliet 4 blade ceiling fan is certified with an IP55 dust and water protection rating which makes it ideal for outdoor areas. It is pre-balanced for smoother, low noise operation and provides excellent cooling effect together with outstanding air circulation. The Juliet features a durable diecast aluminium motor housing and UV resistant ABS blades for a long working life.

- Innovative blade geometry maximises air flow & fan efficiency.
- High quality and reliable AC motor and components.
- Utilises the latest ceiling fan technology and design.
- Engineered for fast and efficient installation.
- IP55 dust and water protection rating makes it ideal for outdoor areas.
- Quick connect terminals simplifies wiring.
- UV resistant ABS blades for a long working life.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).





Mountable on ceilings with a maximum angle of 13°.

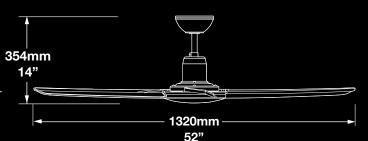

MODEL	JLT52WH
Max. Air Flow m³/hr	13,720
Watts	100
Volts	220-240
Hertz	50
Phase	1
Blade Material	ABS Plastic
Blade Number	4



3 speed wall controller with light switch included.



Optional Remote Control (SFREMOTE)



SCUD

3 BLADE CEILING FAN














The Scud 3 blade ceiling fan provides exceptional air circulation and cooling effect within indoor and covered outdoor areas. It is made from durable ABS for a long working life and pre-balanced for smoother, low noise operation.

- Innovative blade geometry maximises air flow & fan efficiency.
- High quality and reliable AC motor and components.
- Engineered for fast and efficient installation.
- Suitable for indoor and covered outdoor areas.
- Quick connect terminals simplifies wiring.
- Comes with three speed wall controller with light switch.
- Optional remote control available (Part number SFREMOTE).





Mountable on ceilings with a maximum angle of 18°.

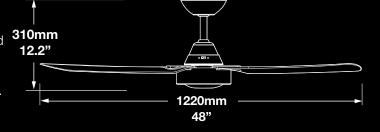

MODEL	SCU48WH	
Max. Air Flow m³/hr	11,400	
Watts	45	
Volts	220-240	
Hertz	50	
Phase	1	
Blade Material	ABS Plastic	
Blade Number	3	



3 speed wall controller with light switch included.



Optional Remote
Control (SFREMOTE)













www.fantechtrade.com.au www.fantechtrade.co.nz

Australia: 1300 387 587 New Zealand: 0800 106 266 A MEMBER OF