



OVOLO

LED Commercial Downlight

Impressive, classic and all-purpose.




OVL14W145R



OVL18W165R



OVL20W200R

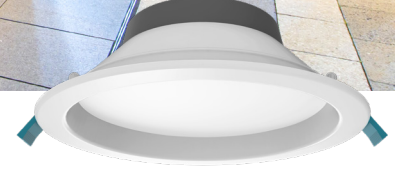

OVL30W230R

OVOLO

LED Commercial Downlight

Impressive, classic and all-purpose.

The OVOLO series combines practical functionality with impressive features such as broad beam angles, multi power and colour selectable options. Ultra-light weight this all-rounder is ideal for indoor & outdoor use due to its IP64 rating.

The OVOLO comes in a range of sizes which adds to its suitability for replacing compact fluorescent lamps and metal halide downlights of various sizes.

 TRITONE Colour Changeable	 2POWER Switchable Modes	 IP64 Ingress Protection Rating	 100° Beam Angle	 50,000hr Expected Lifetime	 4yr Warranty
---	--	---	--	---	---

FEATURES


- Tritone selectable - 3000K, 4000K, 5700K
- Dual power selection
- IP64 ingress protection from below
- Australian ceiling white RAL9016
- Powder coated aluminium construction
- Slightly recessed diffuser
- Complete with 1.2m flex and plug

BENEFITS

- Allows for easy adjustment of output colour
- Making effectively 6 lights in 1 fitting
- Suitable for under outdoor awnings
- Seamless ceiling appearance
- Superior heat dissipation
- Allows for glare reduction
- Easy plug-in installation

FIND OUT MORE:



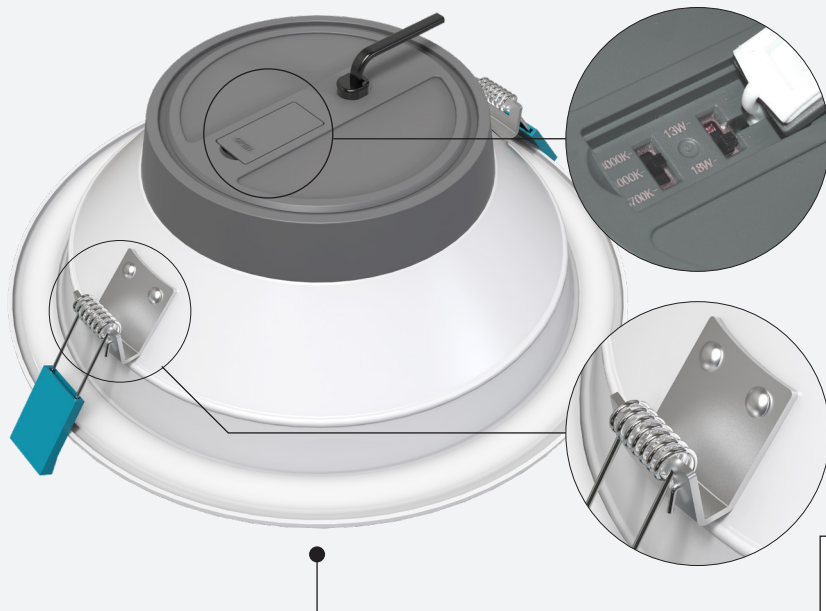


Dual Power Selectable
Easily accessible switch allows selection between two wattages depending on output requirements.


Tritone Selectable
Easily accessible switch allows selection of colour temperatures (3000K, 4000K, 5700K) to suit a variety of environments.

Robust Construction
Lightweight but strong clip arrangement with soft mounting rubber boot fixed to housing with sturdy rivets.


Ingress Protection
(6) Solids
Dust tight. No ingress of dust.
(4) Liquids
Protected against splashing water from any direction




Remote Driver
110 x 42 x 22mm



Remote Driver
110 x 42 x 22mm



Remote Driver
110 x 42 x 22mm



Remote Driver
127 x 43 x 28mm

POWER	CCT	FLUX	HOLE CUT SIZE	WEIGHT	SAP CODE	PRODUCT CODE
10W	3000K	1010 lm	Ø120mm	0.80kg	2002113	OVL14W145R
	4000K	1180 lm				
	5700K	1140 lm				
14W	3000K	1340 lm	Ø135mm	1.00kg	2002114	OVL18W165R
	4000K	1570 lm				
	5700K	1510 lm				
13W	3000K	1380 lm	Ø162mm	1.20kg	2002115	OVL20W200R
	4000K	1570 lm				
	5700K	1550 lm				
18W	3000K	1710 lm	Ø195mm	1.50kg	2002116	OVL30W230R
	4000K	1970 lm				
	5700K	1930 lm				
15W	3000K	1360 lm	Ø195mm	1.50kg	2002116	OVL30W230R
	4000K	1530 lm				
	5700K	1440 lm				
20W	3000K	1900 lm	Ø195mm	1.50kg	2002116	OVL30W230R
	4000K	2130 lm				
	5700K	2010 lm				
23W	3000K	2180 lm	Ø195mm	1.50kg	2002116	OVL30W230R
	4000K	2440 lm				
	5700K	2280 lm				
30W	3000K	2840 lm	Ø195mm	1.50kg	2002116	OVL30W230R
	4000K	3230 lm				
	5700K	3010 lm				




Optional:
Ø310mm adaptor ring
TRIM-310-W
SAP 2002222
(Fits OVL30W230R only)

Ø280mm adaptor ring
TRIM-C2030-280-W
SAP 2001219
(Fits OVL30W230R only)

Optional Dimmable Drivers

Easily add dimmable functionality.



Residential

Haneco Phase-Cut Power Switchable Dimmable Driver with Flex Plug and JST Connector

COMPATIBLE	SAP CODE	PRODUCT CODE
OVL14W145R OVL18W165R	2002159	HD-15-JST-PS
OVL20W200R	2002160	HD-25-JST-PS
OVL30W230R	2002161	HD-30-JST

Commercial

Haneco DALI and 0-10V Power Switchable Dimmable Driver with Flex Plug and JST Connector

COMPATIBLE	SAP CODE	PRODUCT CODE
OVL14W145R OVL18W165R OVL20W200R OVL30W230R	2002149 2002205	HDALI-45-JST-PS H10VD-25-JST-PS

See also

ULTIMATE **COMMERCIAL DOWNLIGHT** COLLECTION



OVOLO
Impressive,
classic and all-purpose




ASTRO
Premium low glare




HELIX
Robust, powerful output



CENTAURI
Ultra-low-profile



MARS
Premium, precise light control



STELLAR
Focal point control



VIVA
Flush, seamless design



AURORA
Recessed, contemporary design



1300 001 LED (533)

 haneco.com.au