




VISTA plus

VISTA-PL12
SAP CODE: 2001925

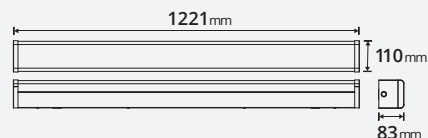


1221mm, 20/29/32/40W
Ecoswitch, Tritone,
110mm wide
conventional
appearance LED batten.

An LED replacement for
conventional battens with
Tritone CCT & quadruple power
switchable for specification and
commercial applications.



Photometric
Diagram



Unit: cd
- C0/180 115 deg
- C90/270 135 deg

KEY INFORMATION

Lumen Output	40W	4700 / 5000 / 4700lm
	32W	3700 / 3600 / 3600lm
	29W	3300 / 3350 / 3300lm
	20W	2600 / 2650 / 2600lm
Input Power	40W, 32W, 29W, 20W	
Hole Cutout Size	N/A	
Install	SURFACE MOUNT	
Dimming Options	Non-Dimmable	
Fitting Colour	WHITE	
Warranty	5yr	
IP Rating	IP20	
IK Rating	07	
IC Rating	N/A	
Rebate Scheme Approvals	N/A	

PHOTOMETRIC

Efficacy	40W	118 / 125 / 118lm/W
	32W	116 / 113 / 113lm/W
	29W	114 / 116 / 114lm/W
	20W	130 / 133 / 130lm/W
LED	SMD	
CCT	4000 / 4700 / 5700K	
CRI	>80	
Beam Angle	115x135°	

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	58VDC
Power Factor	>0.9
LED Input Current (nominal)	350-700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Steel
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	2.4kg
Dimensions	1221 x 110 x 83mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 1