

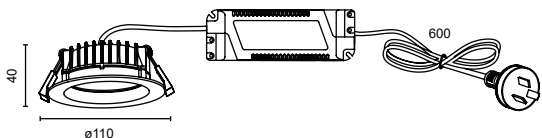


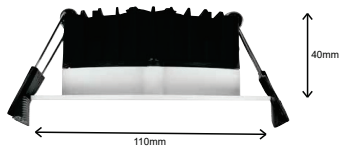

10w RGBW Downlight

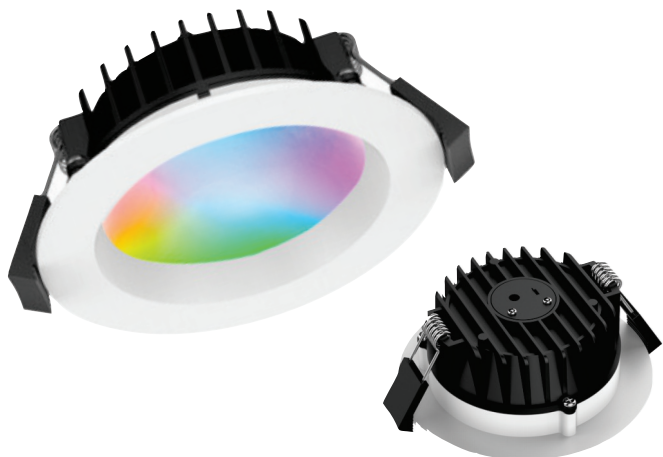

Improved Design & Features

Our new 10watt Downlight features some key improvements from our previous RGBW DL.

- Improved diffuser lense construction for reduced glare and improved light distribution.
- The lumen output has been increased with improved SMD and Driver performance..
- The Automation functions have been improved allowing the user greater control of the colour selection and automation controls.
- External LED Driver

Product image is for reference only, actual product may appear different



SAIGLOBAL
ISO 9001
Quality



Manufactured to ISO9001 quality standards

Specifications

Model	LODL921-2
Construction	Plastic Coated Aluminium
LED Type	Epistar SMD
Wattage	10W
CRI	>80
Dimmable	1% - 100%
Light Output	840lm (±5%)
Beam Angle	90°
Lense	Polycarbonate
IP Rating	IP54 (Outside Ceiling)
Safety Rating	IC-4, Class III, RCM
Cut out size	90 -95mm
Network	2.4GHz WiFi 802.11 b/g/n
Warranty	5 years ^{1 2}



IP 44 (in ceiling)
IP 54 (outside ceiling)

Indoor
Outdoor



16 million different colours
3500 - 7000k CCT

RGB + Tri CCT



10A plug and lead for
quick connection

600mm Lead
& 3 Pin Plug



Improved Automation functions
for greater control and programming

¹ Actual life may vary depending on individual circumstances
² Warranty subject to claim criteria

The information provided in this document contains general descriptions and/or technical characteristics of the performance of the product contained herein.

Due to continual product development, Clever Life Pty Ltd reserve the right to alter product details and specifications without prior notice.

Head Office: Townsville, Queensland | PO BOX 4321, Kirwan 4817
Toll Free 1300 315 083 E: imagine@cleverlife.com.au

