

# ROBUS®

## DOWNLIGHTS

### APUS CCT3 LED DOWNLIGHT

8W

CCT3



## PRODUCT INFORMATION DOCUMENT

### FEATURES

- Switch on the back of the fitting allows selection between 3,000K, 4,000K and 6,500K colour temperature.
- Offers Thermal Insulation rating of IC-4
- Dimming Compatible with most TRIAC dimmers (compatibility list available on the website)

### CONSTRUCTION

- Polycarbonate/Nylon housing
- Polycarbonate opal diffuser
- Prewired with 800mm flex and plug



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



IK RATING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



DIMMING



CCT




SAFETY CLASS




IC-4

AU	RAP8WCCT3-01
Comparable to:	50W halogen
Total Power (W):	8.0/7.7/8.0
Total Light Output (lm):	720/830/740
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	91/109/93
IP:	44
Operation Temperature (°C)	-20 ≤ Ta ≤ +40
Lux at 1m (lux):	250/290/260
Emergency Lux at 1m (lux):	NA
Inrush Current:	17.6A/0.26us
CCT (K):	3000/4000/6500
RG Value:	0
Rated Life to L70B50 (Hrs):	>30000
Dimensions ØxH (mm):	108x60
Cut Out (mm):	90
Weight (kg):	0.22

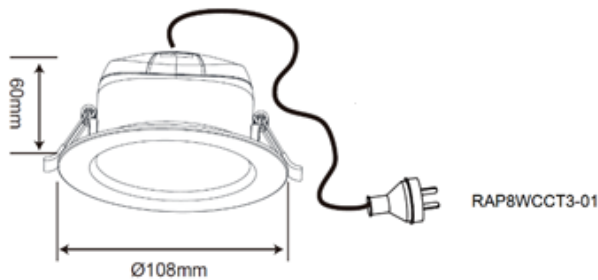

Product is certified to all the relevant standards.  
Please contact our technical department for market specific compliances.

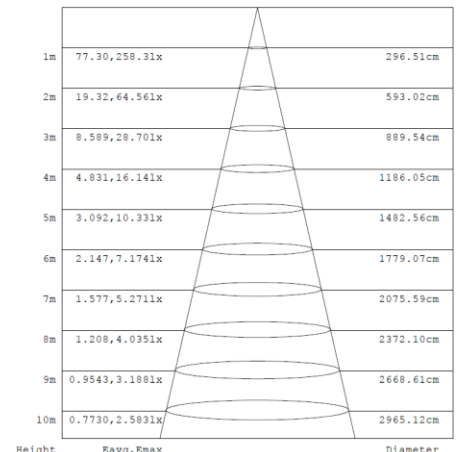

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Diagram for RAP8WCCT3-01 in 3000K. Other diagrams available on request

IRE: TEL: +353 1 709 9000  
UK: TEL: 0800 973 220  
AUS: TEL: +61 7 3890 5444  
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM  
WEB: ROBUS.COM  
WEB: ROBUS.COM.AU  
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA