

Catalogue No: CA7-60-00-415VAC

CONTACTOR 30kW 3P 415V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



Representative Photo Only
(actual product may vary based on configuration selections)

Contactor 3 pole 60A 30kW 415V AC Coil

- Several contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

SPECIFICATIONS

Product Series	CA7-60
Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	100 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	32 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	60 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	32 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	34 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	6.5 VA 19
Coil Consumption Hold-in W DC coiled contactors	4.5 W
Coil Consumption Pickup VA AC coiled contactors	235 VA
Coil Consumption Pickup W DC coiled contactors	200 W
Integrated Aux	No Auxiliary Contacts
Coil Voltage	415 V AC V
Un, Coil Voltage, AC @50Hz, Nom	415 V AC nom @50Hz
Un, Coil Voltage, AC @50Hz, Min	353 V AC min @50Hz
Un, Coil Voltage, AC @50Hz, Max	456 V AC max @50Hz
IP Rating	IP20

Catalogue No: CA7-60-00-415VAC

CONTACTOR 30kW 3P 415V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



REFERENCES

IECEX Certificate -


Supplier Declaration of
Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue
& Product Selection: -

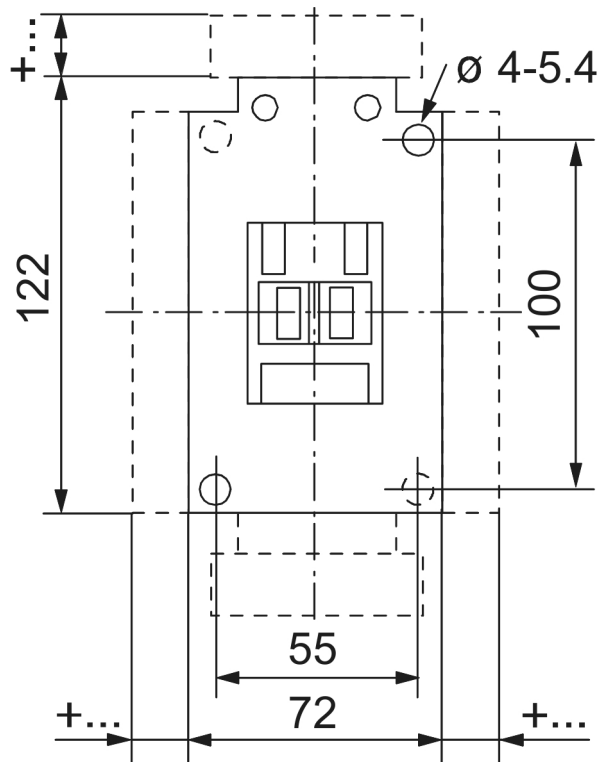

Dimension Diagram