


# Catalogue No: CA7-9-01-24VAC

## CONTACTOR 4kW 3P 24V AC COIL 1NC AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

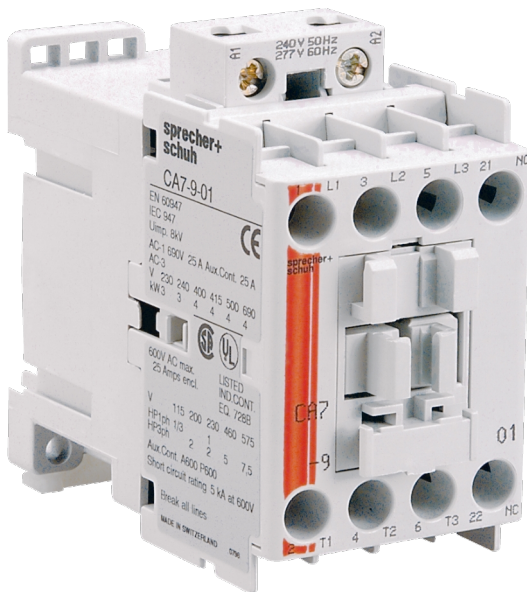

### Contactors 3 pole 9A 4kW 1N/C Auxiliary 24V AC Coil

- Several contactor families provide a wide variety of contactor sizes, offering economy and selection
- Compact dimensions saves panel space

Representative Photo Only  
(actual product may vary based on configuration selections)

#### SPECIFICATIONS


Product Series	CA7-09
Component Type	Motor Control and Drives
Component Type	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 40°C	32 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	4 kW @415V, 60°C
Ie, Rated Operational Current, AC-3, 415V, 60°C	9 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	4 kW @690V, 60°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	5 A@690V,60°C
Number of Poles	3
Contact Configuration, Main Poles	3 NO main poles
Coil Type	Conventional type
Coil Consumption Hold-in VA AC coiled contactors	2.7 VA 9.5
Coil Consumption Pickup VA AC coiled contactors	75 VA
Integrated Aux	1 N/C
Coil Voltage	24 V AC V
Un, Coil Voltage, AC @50Hz, Nom	24 V AC nom @50Hz
Un, Coil Voltage, AC @50Hz, Min	21 V AC min @50Hz
Un, Coil Voltage, AC @50Hz, Max	27 V AC max @50Hz
Tightening Torque, Power Terminals, max	2 Nm max
IP Rating	IP20

Catalogue No: **CA7-9-01-24VAC**  
**CONTACTOR 4kW 3P 24V AC COIL 1NC AUXILIARY**

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7  
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

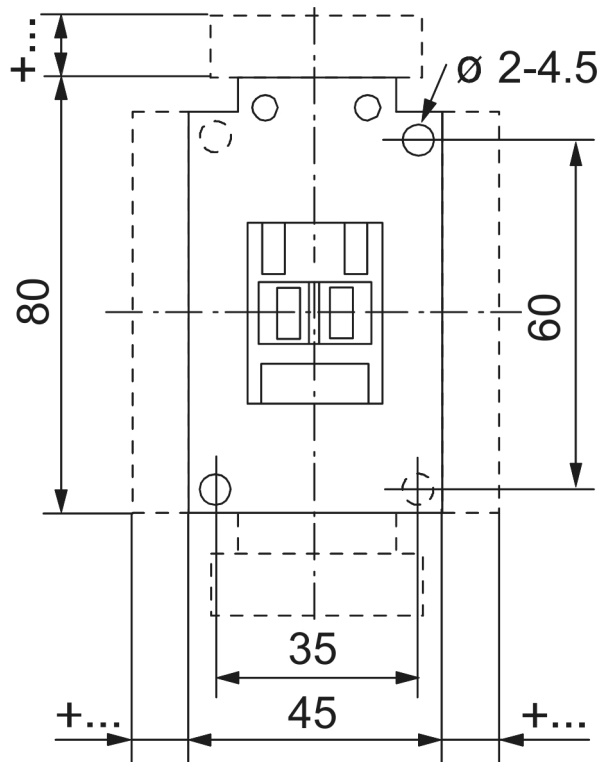

Dimension Diagram