



# TL-D Standard Colours

## TL-D 10W/33-640 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	G13 [ Medium Bi-Pin Fluorescent]
Life to 50% failures (nom.)	5000 h

Light Technical	
Colour Code	33-640
Lamp Luminous Flux 25°C EL (Nom)	440 lm
Colour Designation	Cool White (CW)
Lumen maintenance 2,000 hours (nom.)	85 %
Lumen maintenance 5,000 hours (nom.)	80 %
Colour Temperature, horizontal (Nom)	4100 K
Colour Rendering Index,horiz (Nom)	60

Operating and Electrical	
Power (Rated) (Nom)	10 W
Lamp current (nom.)	0.230 A
Voltage (Nom)	46 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb shape	T8 [ 26 mm (T8)]

Approval and Application	
Mercury (Hg) content (nom.)	8.0 mg


Product Data	
Full product code	871150064128100
Order product name	TL-D 10W/33-640 1SL/25
EAN/UPC – product	8711500641281
Order code	928024003331
Local order code	TLD10W33PK25
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	928024003331
SAP net weight (piece)	0.045 kg

# TL-D Standard Colours

ILCOS code

FD-10/41/2B-E-G13


## Dimensional drawing

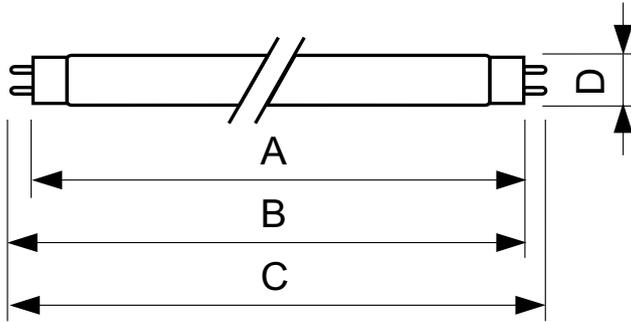

TL-D 10W/33-640

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 10W/33-640 1SL/25	28 mm	331.5 mm	338.6 mm	336.2 mm	345.7 mm


## Photometric data

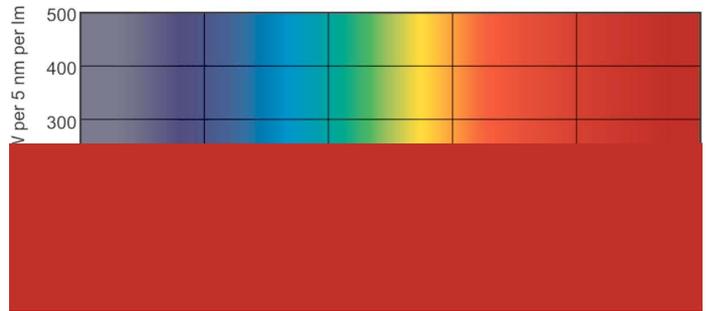


Lightcolour /33-640

Lightcolour /33-640

## Lifetime

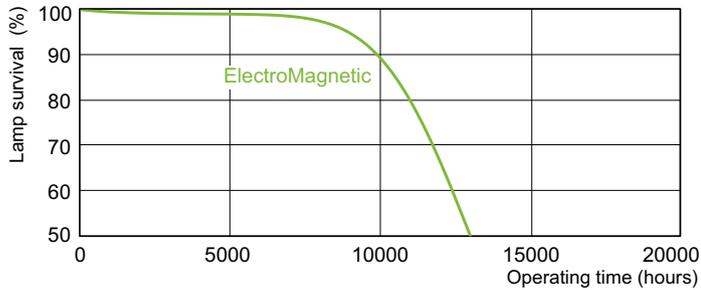


LDLE\_TL-DSTD\_0001-Life expectancy diagram

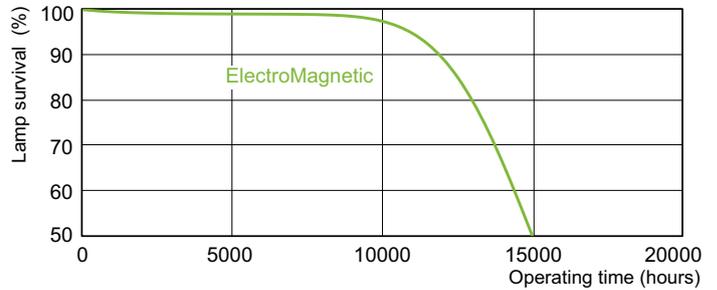

LDLE\_TL-DSTD\_0002-Life expectancy diagram

## TL-D Standard Colours

### Lifetime

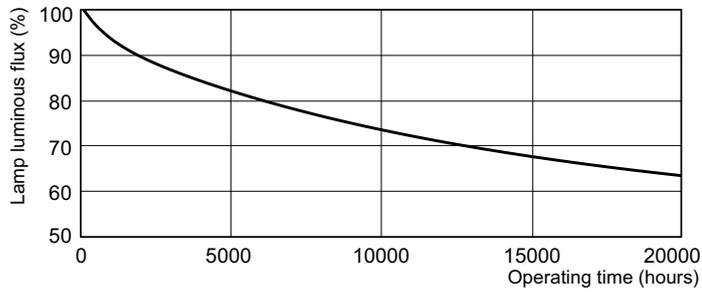

LDLM\_TL-DSTD\_0001-Lumen maintenance diagram

