

# Litelux Colour Select LED Downlight Gen3

## DLP63/4/65FWG3

- In-built driver for an easy and quick installation
- IC-4 compliant - Safe against building thermal materials and insulation
- Freedom of Choice - Select Colour temperature from 3000K/4000K/6500K




### COLOUR SELECT

#### Performance

System Power	7W, 7W, 7W
Exit Lumen	750lm, 730lm, 750lm
Efficacy	107lm/W, 104lm/W, 107lm/W
Tuneable CCT	N/AK to N/AK
CCT	3000K, 4000K, 6500K
CRI	80
Operating Temperature	0°C to 40°C
MacAdam Steps	6SDCM
Ingress Protection Rating	IP44
Beam Distribution	Symmetric
Beam Angle	95°
Warranty	3 Years
Lifetime	30,000hrs (L70/B50)

#### Line Drawings

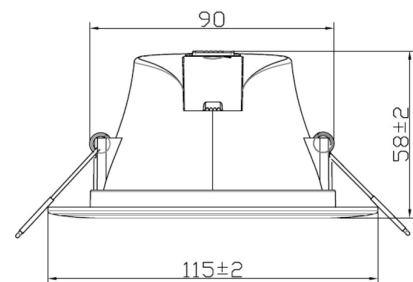

#### Product Images




#### Physical

Dimensions	Ø115 x H58mm
Cutout Diameter	90mm
Diffuser	Polystyrene
Luminaire Colour	White
Weight	0.21kg
Luminaire Material	Aluminium
Driver Location	Integrated
Heatsink	Aluminium
Finish	White
Installation	Recessed

#### Electrical

Dimming	Phase
Voltage	240V
Inrush Current	2A
Inrush Current Duration	17µs
Line Current	0.03A
Electrical Rating	Class II

Line Drawings

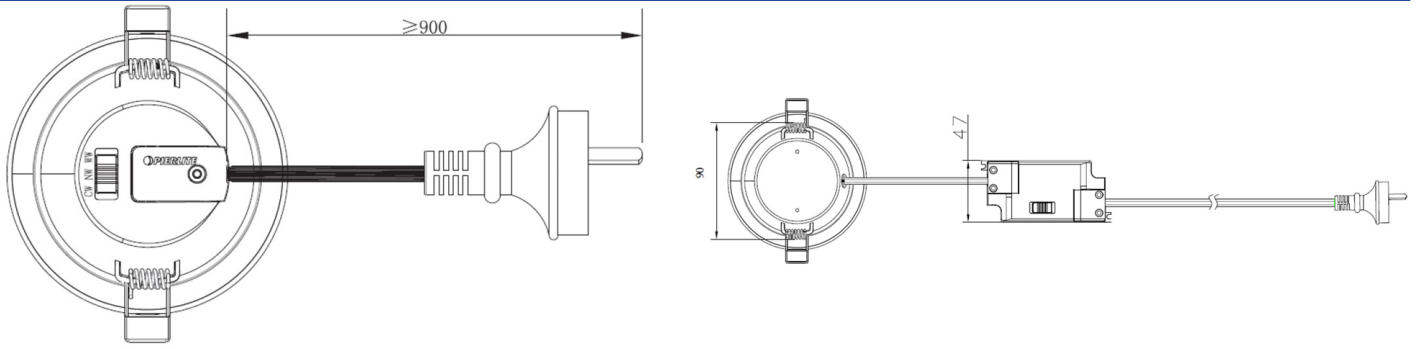

Product Images

