



DIM40 - 12V 40W

Australian approved IP65 dimmable 12V constant voltage LED power supply

Application

Suitable for LED strip, trailing edge dimming models

Design Specifications

- SELV and EMC compliant
- Safe no load operation, 40 watt, minimum load 5 watt, PF >0.9, output 12V
- Overload and short circuit protection
- 1.2 m flex & 2 pin plug fitted (DIM40W), 1.2 m flex & 2 pin plug fitted, secondary output fly leads
- Recommended SAL trailing edge dimmers; SDD350UM, SDD400U, SDA450U/LED
- Electrical class II, Do Not Cover



Performance

- Dimmable - **YES**
- Dimmer Type - **TRAILING EDGE**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Frequency (Hz)	Output Voltage (V/DC)	Power (W)	Power Factor
	DIM40/12V	240	50	12	40	0.9


Dimmable	Dim (mm)
YES	155(L) x 43(W) x 26(H)


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

Wiring Diagram

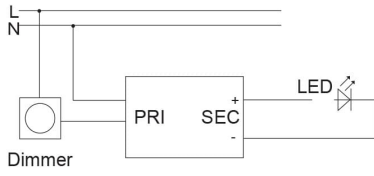

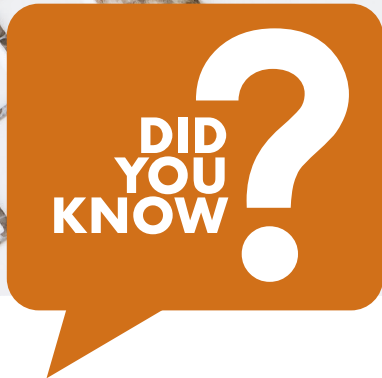

In the interest of safety and product performance, all electrical accessory components are covered by mandatory Australian and International Safety Standards. Always look out for the RCM logo on the product and if in doubt, check the compliance via your local Electrical regulator.

