



FLEXI 12V SINGLE COLOUR 5M KIT IP44, FLP12V5M/S - 6W/M

Single white colour 12V, LED strip KIT 5m

Application

An creative solution for residential and commercial interior spaces

Design Specifications

- 12V weatherproof LED flexible strip with 3M self-adhesive tapes at back
- Pre-wired strip kit includes IP20 LED driver, IP44 LED strip & 1.2 m flex & 2 pin plug
- Non-dimmable driver as standard, optional dimmable driver to order.
- High efficiency SMD LED chips, beam angle 115°
- Choice of 3000K or 5000K
- Cutable every 50 mm at the scissors symbol, 5m kits. NOTE: when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads. LED channel options refer this section



- SMD 2835
- IP44
- SMD 2835
- IP44
- WARM WHITE 3000K
- NEUTRAL DAYLIGHT 5000K
- 2 YEAR COMMERCIAL WARRANTY
- 3 YEAR RESIDENTIAL WARRANTY


Technical Specification

Model No.	Input Voltage (V/AC)	Watts per metre (W/m)	Beam Angle (°)	Body Colour	CRI	Luminous Flux Per Meter (lm/m)
FLP12V5M/WW/S	240	6	115	CLEAR	80	300
FLP12V5M/NDL/S	240	6	115	CLEAR	80	300

Model No.	LEDs Per Metre	Dim (mm)	Colour Temp. (K)
FLP12V5M/WW/S	60	5000(L) x 8(W) x 2.5(H)	3000
FLP12V5M/NDL/S	60	5000(L) x 8(W) x 2.5(H)	5000

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

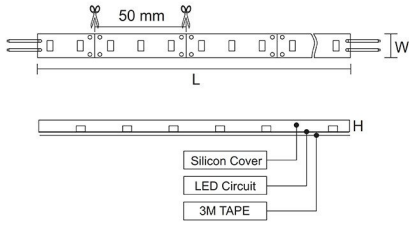

TO TURN YOUR HOME INTO A **PIXIE SMART HOME**, SELECT A **PIXIE CERTIFIED INSTALLER**.



SIMPLE!

For more
information
please
scan me

