



## LT SERIES LT407TC - 7W



7 watt LED SMD tubular lamps, with selectable colour temperature

### Application

Energy efficient LED lamp solutions

### Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, beam 200 degree
- Integral non-dimmable LED driver
- Selectable colour temperature 3000K / 4000K / 6000K, CRI > 80
- Suits most CFL lamp fitting, lamp bases B22, E27, B15, E14, double insulation

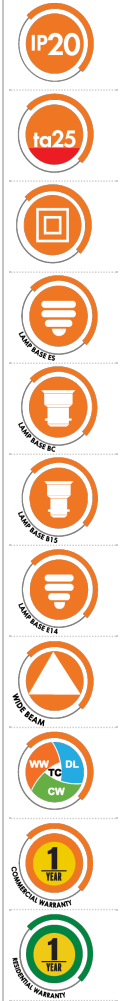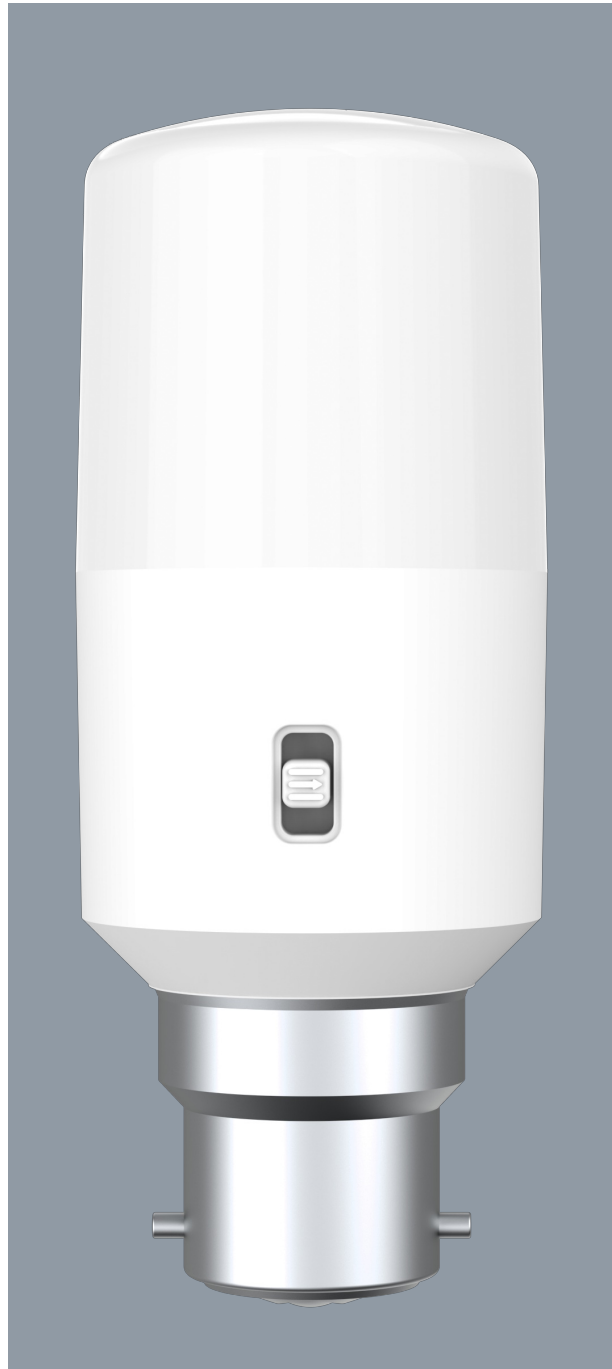



## Technical Specification

| Model No.   | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K)        | CRI | Beam Angle (°) |
|-------------|----------------------|-----------|-------------|----------------|-----|----------------|
| LT407TC/B15 | 240                  | 7         | 650/700/650 | 3000/4000/6000 | 80  | 200            |
| LT407TC/E14 | 240                  | 7         | 650/700/650 | 3000/4000/6000 | 80  | 200            |
| LT407TC/B22 | 240                  | 7         | 650/700/650 | 3000/4000/6000 | 80  | 200            |
| LT407TC/E27 | 240                  | 7         | 650/700/650 | 3000/4000/6000 | 80  | 200            |

| Model No.   | Dimmable | Diameter (mm) | Length (mm) | Base Type |
|-------------|----------|---------------|-------------|-----------|
| LT407TC/B15 | NO       | 40            | 98          | B15       |
| LT407TC/E14 | NO       | 40            | 101         | E14       |
| LT407TC/B22 | NO       | 40            | 101         | B22       |
| LT407TC/E27 | NO       | 40            | 102         | E27       |

**IMPORTANT**, where CCT selection switching is provided, it is important to switch OFF the SUPPLY before the CCT selection is made, otherwise equipment damage may occur.


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions



LT407 B15    LT407 B22    LT407 E14    LT407 E27

### Dimensions

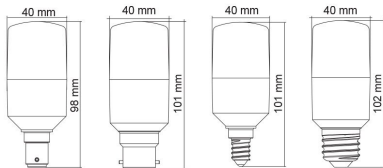

# THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY  
MATCH THE  
UNIFIT SFI  
DOWNLIGHT  
WITH THIS  
SDD400SFI  
DIMMER.**



**DIM with  
FLICKER  
CONTROL**

For related  
products  
please  
scan me

