



PREMIER S9076TC DP/HP - 18/40W

Non-dimmable IP64, 40W LED downlight with selectable CCT and power

Application

Ideal for any residential, retail or commercial interior spaces

Design Specifications

- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency LED optics
- Constant current remote non-dimmable LED driver, with flex and plug

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Dual power, 1-10V, DALI / DSI - Half power, trailing edge, 1-10V, DALI / DSI**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Multiple Wattage	Lumens (lm)	CCT (K)
	S9076TC/WH/HP	240	18		2100/2300/2200	3000/4000/5700
	S9076TC/WH/DP	240		30/40	3500/4200/3800	3000/4000/5700

Beam Angle (°)	Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
90	OPTIONAL	80	White	240	280	96(H)
90	OPTIONAL	80	White	240	280	96(H)

IPART	REES	VEET
YES	YES	YES




Note: Lumens (lm) shown are displayed at maximum power rating

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

S9076TC

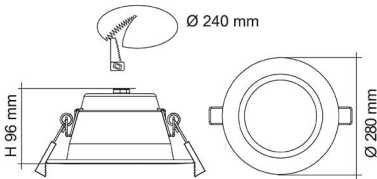


Photometric Data

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9076TC/WH/DP at 4000K



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

