



## BLADE SL9709 TC - 25/48W

LED low profile batten with selectable colour temperature

### Application

Conventional LED profile battens for commercial service spaces

### Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K, 4000K, 5000K
- Extruded aluminium body with plastic end cap with a rear cable channel allowing easy wiring
- Quality white powder coat finish
- Integral constant current non-dimmable LED driver, 25 or 40 watt
- Robust opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, 110 degree beam



- 
- 
- 
- 
- 
- 
- 
- 
- 
- 


### Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL9709/60TC	LED BATTEN 25W 613mm 3/4/5K	240	25	2200/2600/2400	3000/4000/5700	80
SL9709/120TC	LED BATTEN 48W 1213mm 3/4/5K	240	48	4400/5000/4800	3000/4000/5700	80

Model No.	Beam Angle (°)	Dimensions (mm)	Body Colour
SL9709/60TC	110	613(L) x 120(W) x 34(H)	WHITE
SL9709/120TC	110	1213(L) x 120(W) x 34(H)	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

### Dimensions

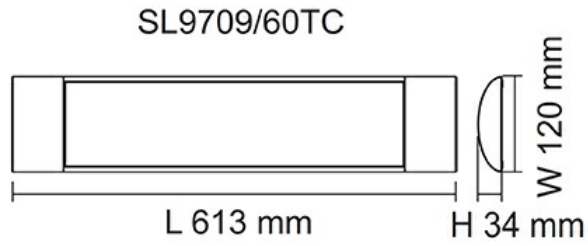


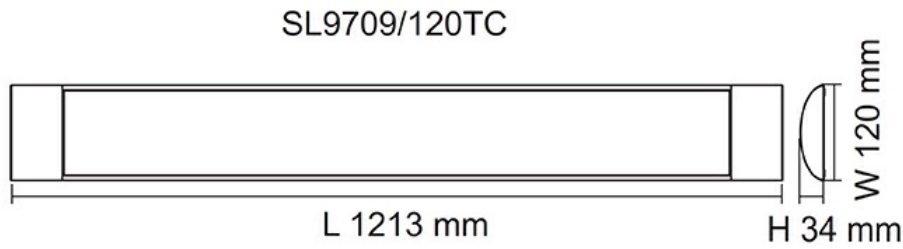


## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

**SL9709/60TC at 3000K**

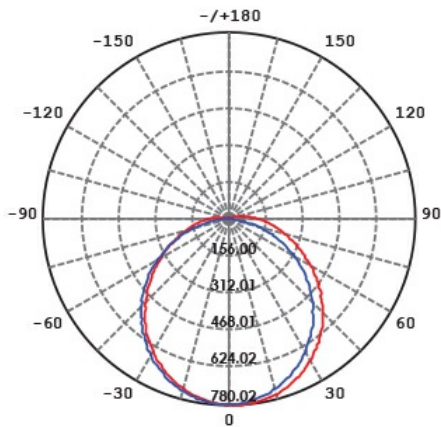

**SL9709/120TC at 5700K**

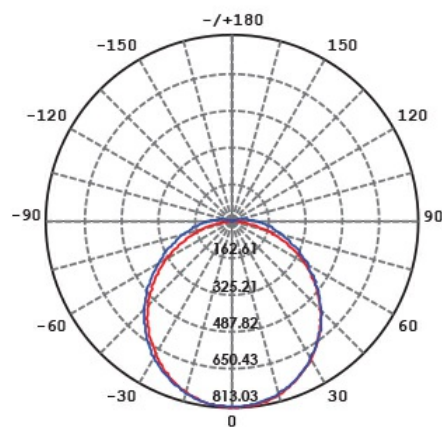



## Product Images

