



SOL SL9726TC/EM - 20/42W

Maintained or Non-Maintained emergency, IP65 LED weatherproof batten with selectable CCT and power

Application



Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications

- Selectable power and CCT 3000/4000/6000K
- Rounded shape vandal proof design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable LED driver, optional corridorSTANDBY function for the 40 watt model
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology. Emergency classification (20w) D32@C0, D25@C90, (40w) D40@C0, D40@C90
- Accessories included - PVC cable glands and suspension brackets. Installation types - Surface mount (standard) or if Suspended (a suspension kit is required). DALI option available.



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Lumens (lm)	Multiple Wattage	CRI	Body Colour
	SL9726/20TC/EM	240	2040/2300/2200	10/20	80	GREY
	SL9726/40TC/EM	240	4370/4990/4720	20/42	80	GREY


Dim (mm)	IPART	VEET
642(L) x 118(W) x 77(H)	YES	YES
1251(L) x 118(W) x 77(H)	YES	YES

Important notes: (1) Lumens (lm) shown are at full rated power (2) In the interest of transport and safety, emergency products are supplied with the battery disconnected. (3) In addition to specific emergency commissioning instructions, the battery **MUST** be connected at the time of installation. (4) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

(642 x 118 x 77mm), (1251 x 118 x 77mm)

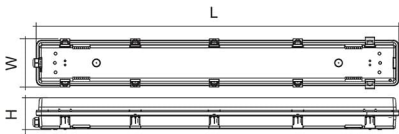


Photometric Data

Photometric Data (at maintained power)

Unit: cd C0/C180 — C30/C210
cd C60/C240 — C90/C270

SL9726/20TC/EM at 3000K

SL9726/40TC/EM at 4000K

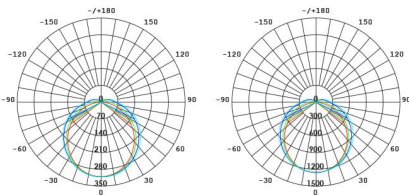



Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

Need more information on IP ratings? Check out the SAL web FAQ's or speak to your local SAL team member.

**For more
information
please
scan me**

