
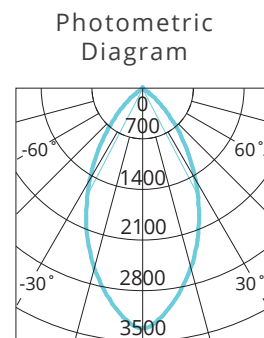


ASTRO

ASTRO30W230R

SAP CODE: 2001947

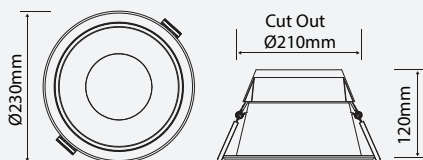

Unit: cd
 - C0/180 55.0deg
 - C90/270 55.2deg

High Output Commercial Downlight

Deep recessed 24/32W High Output Tritone Downlight with remote diver and polish reflector

KEY INFORMATION

Lumen Output	32W 24W	2850 / 3100 / 3000lm 2100 / 2300 / 2200lm
Input Power	32W, 24W	
Hole Cutout Size	Ø210mm	
Install	RECESSED	
Dimming Options	Non-Dimmable	
Fitting Colour	WHITE	
Warranty	4yr	
IP Rating	IP54	
IK Rating	N/A	
IC Rating	N/A	
Rebate Scheme Approvals	N/A	

PHOTOMETRIC

Efficacy	32W 24W	89 / 97 / 94lm/W 88 / 96 / 92lm/W
LED	SMD	
CCT	3000 / 4000 / 5700K	
CRI	>80	
Beam Angle	53	

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	45VDC
Power Factor	>0.9
LED Input Current (nominal)	700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium 1070
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1m Flex & Plug
Total Weight	0.83kg
Dimensions	Ø230 x 120mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 2