

CB254 CB254 Cantilever Bracket


EzyStrut


Hot Dip Galvanised

Aluminium (MTO) **FRP** Fibre Reinforced Plastic

(MTO CB4 Only)

D OTHER MADE TO ORDER (MTO) **SIZES & FINISH OPTIONS AVAILABLE**

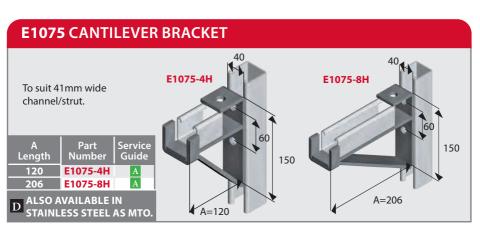

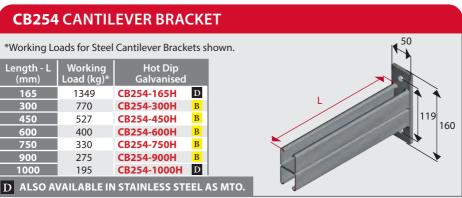

Service Guide Key:

Usually in stock at all branches

Normal lead time

B Usually in stock at head office D Made to Order (lead time on enquiry)






* Working Loads for Steel Cantilever Brackets shown.

I Wayling Hat Din Ctainless


Length - L (mm)	Working Load (kg)*	Galvanised	Stainless
150	526	CB2-150H A	CB2-150S B
300	262	CB2-300H A	CB2-300S B
450	175	CB2-450H A	CB2-450S B
600	131	CB2-600H A	CB2-600S B
750	105	CB2-750H A	CB2-750S C
900	88	CB2-900H A	CB2-900S C



CB4 CANTILEVER BRACKET

*Working Loads for Steel Cantilever Brackets shown.

Length - L (mm)	Working Load (kg)*	Hot Dip Galvanised	Stainless Steel
300	1000	CB4-300H A	CB4-300S B
450	350	CB4-450H A	CB4-450S B
600	345	CB4-600H A	CB4-600S B
750	294	CB4-750H A	CB4-750S B
900	150	CB4-900H A	CB4-900S C



ET3/5 TRAPEZE BRACKET

*Working Load is to be a uniformly distributed load along the length of the trapeze.

Suits Tray Width (mm)	Length (L) (mm)	Working Load (kg)*	Pre- Galvanised	Hot Dip Galvanised
150	250	105	TB150G A	TB150H
225	325	78	TB225G A	TB225H
300	400	62	TB300G A	TB300H
450	550	44	TB450G A	TB450H
600	700	34	TB600G A	TB600H



ET3/5 E4000SG TRAPEZE BRACKET

*Working Load is to be a uniformly distributed load along the length of the trapeze.

Suits Tray Width (mm)	Length (L) (mm)	Working Load (kg)*	No. of Slots	Pre- Galvanised	Hot Dip Galvanised
150	263	524	7	TB1504000SG C	TB1504000SH C
225	338	350	9	TB2254000SG 🖸	TB2254000SH C
300	413	262	11	TB3004000SG C	TB3004000SH C
450	563	175	15	TB4504000SG C	TB4504000SH 🖸
600	713	131	19	TB6004000SG C	TB6004000SH C

