




Garland Cat6 RJ45 clear plug

General purpose Cat6 RJ45 (8P8C) plug with insert for termination onto stranded and solid conductors. Clear polycarbonate housing with gold plated contacts.

Applicable Standards

- ISO/IEC 11801-1:2017 & 11801-2:2017
- EN 50173-1:2018 & EN 50172-2:2018
- TIA/EIA 568.2D:2018
- IEC 61935-2:2010
- IEC 60512-99-001:2012

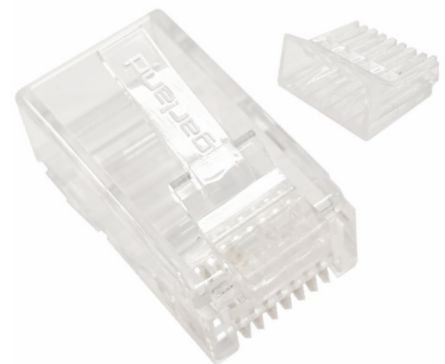

*For illustration purposes only

Applications

Used for terminating solid or stranded Cat6 cabling in Structured cabling, computer networks and security systems.

Part Number	MT6P3U		
Contact Blades	Main Material	Copper Alloy	
	Prongs	3 Per Blade	
	Gold Plating	50µm	
Body	Poly carbonate		
	Colour	Clear/Transparent	
Conductor Suitability	Conductor Size	23 AWG to 26 AWG	
	Conductor Type	Solid or Stranded (7 Strands)	
Mechanical Properties	Temperature range	Storage	-20C to +35C
		Operating	-20 to +50C
	Durability	750 Mating Cycles	

Part Number	Qty Per pack	Pack Type	Carton Size
MT6P3U-50	50	Ziplock Poly Bag	51.6 x 36.2 x 32 cm
MT6P3U-100J	100	Jar	36 x 36 x 29 cm

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**

www.garlandcables.com.au

MADE BY

